



- CE Certified
- ISO 8846 MARINE (Ignition Protection)
- ISO 8849 MARINE (Bilge Pump Standard)

CARAVAN PUMPS

TMC-04301 · TMC-04302

PRODUCT FEATURE



- Compact design enables an easy introduction in a tank.
- Low amperage draw
- DC-12V / 24V available
- Designed for intermittent use and fully submersible only.
- Max. continuous operation should not exceed 15 minutes.
- Wide variety of uses including emptying, filling and transferring of liquid containing no solid matter.

SPECIFICATION

MODEL NO.	CAPACITY	CONSUMPTION			0M / 0kpa		1M / 10kpa		2M / 20kpa		MAX. HEAD		HOSE DIA.	
		V	A	A	GPH	LPH	GPH	LPH	GPH	LPH	FT.	M	inch	mm
TMC-04301	100GPH	12	2	3	100	379	90	340	60	227	16	5	13/32	10.3
		24	1	1.5										
TMC-04302	160GPH	12	2.5	4	160	608	130	492	90	340	15	4.6	11/32	8.7
		24	1	1.5									13/32	10.3

† Delivery volume GPH/LPH may vary by +/-10% depending on power source, hose type, and other variables.

DIMENSIONS

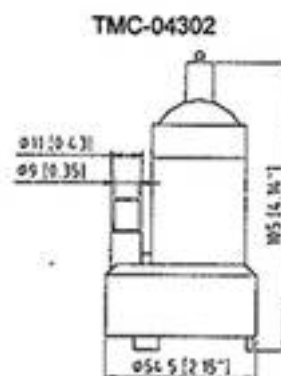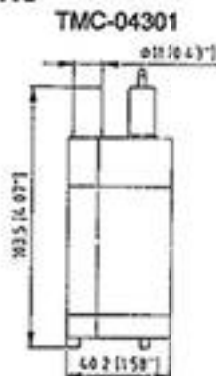

NOTES

- Do not run the pump dry.
- Do not use the pump in water temperature above 60°C (140°F)
- Max. continuous operation should not exceed 15 minutes.
- Check that the polarity is correct.

WIRING DIAGRAM

