


# CleanAHull™

By GLOBAtech Australia

## CleanAHull – Quad 4 Transducer System

### Specifications

Power (auto switching)	12/24 Volt
12 volt operating range	10.6V – 16V
12 volt cut off voltage	10.5V
Current draw @ 12v	980ma (avg.)
24 volt operating range	22.6V – 30V
24 volt cut off voltage	22.5V
Current draw @ 24v	490ma (avg.)
Transducer power output	50 watts max.
Operating temperature	-6°F to 150°F
Storage temperature	-22°F to 158°F
Maximum relative humidity	100%
Control console dimensions	7.91" x 4.76" x 2.17"
Control console cable length	16 ft.
Transducer dimensions	2.36" x 2.36"
Transducer cable length	32 ft.
Transducer Mounting Plate Dims	2.36" x 0.2"
Regulatory Certifications	FCC Part 15B
	ANSI C63.4
	AS/NZS 61000.6.3
<b>System Components Included:</b>	
Control Console w/power cable	1 ea.
Transducers w/integral cables	4 ea.
In-line power fuse holder	1 ea.
20A power fuse	1 ea.
Spare 10A transducer circuit fuse	1 ea.
Epoxy transducer bonding kit	1 Kit
Operation & Installation Manual	1 ea.

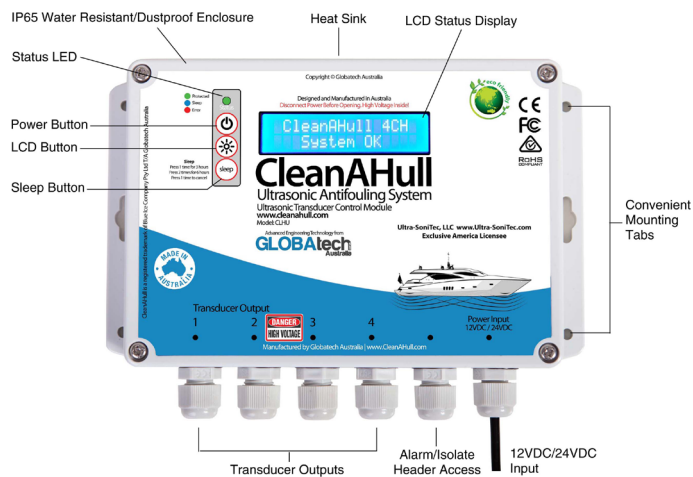

1140 Tate Blvd. SE  
Hickory, NC 28602

[www.Ultra-Sonitec.com](http://www.Ultra-Sonitec.com)

626-360-4749

[sales@ultra-sonitec.com](mailto:sales@ultra-sonitec.com)



Exclusive North American Distributor

# CleanAHull™

By GLOBAtech Australia


## CleanAHull – Quad 4 Transducer System

### Advanced Ultrasonic Antifouling System



- Multi-function LCD control screen
- Touch pad user interface
- Auto calibration function, automatically calibrates to your hull
- Remote power control capable
- Hi-tech professional design controller
- High acoustic mass 50 watt transducers
- Anodized compact transducer design
- Anodized transducer mounting plates
- 32 ft. long transducer cables
- Dedicated two circuit ultrasonic generators
- Individually fused generator circuits
- Auto sensing dual 12/24 voltage
- 15 ft. control power cable
- Low power consumption
- Low voltage sensing and cut off
- Dynamic temperature control
- ENIG coated circuit board
- Water resistant IP65 rated control enclosure
- Submersible IP68 rated transducers
- Installation materials included

#### Industry Leading Features



Advanced Smarts  
Zero Configuration  
Dynamic Algorithms



Status At A Touch  
Multi-Function  
Liquid Crystal Display



Automatic 12/24V  
Self Monitoring  
Low Voltage Protect



"Blast" Algorithm  
Extra Power Burst  
Enhanced Protection



Dedicated Generators  
Quality Components  
ENIG Plated PCB  
Indiv. Fused Circuits



High Acoustic Mass  
Anodized Aluminum  
Piezo Quartz Element  
IP68 Rated (+3 ft.)



Lexan Enclosure  
Lexan Face  
IP65 Rated  
Touch Key Pad



Australian Engineering  
Australian Manufacturing  
AS/NZS 61000.6.3  
FCC Part 15 (B) Class B

1140 Tate Blvd. SE,  
Hickory, NC 28602

[www.Ultra-Sonitec.com](http://www.Ultra-Sonitec.com)

626-360-4749

[sales@ultra-sonitec.com](mailto:sales@ultra-sonitec.com)



Exclusive North American Distributor