



4. Hatches & Portlights

Standard Portlight

A perfect match for any hatch in the Lewmar range, the Standard Portlight is stylish, competitively priced and easy to both use and install.


- Easily fitted by clamping the cabin sides between inner and outer frame with screws provided that are fastened into the outer frame
- Can be installed with sealant or closed cell PVC tape
- White ABS Plastic Trim
- Cut out shape available from www.lewmar.com
- Supplied complete with flyscreen (except sizes 4L and 4R)
- Full range of spare parts available on-line www.lewmar.com




Optional twist handle, contact your Lewmar representative for part numbers

Specifications options:


- Handles: clip (standard) / twist (option)
- Moulding colour Grey
- Acrylic colour: Grey (standard) other colours optional
- Frame colour: Silver anodized (standard) other finishes available
- Come complete with trim and flyscreen

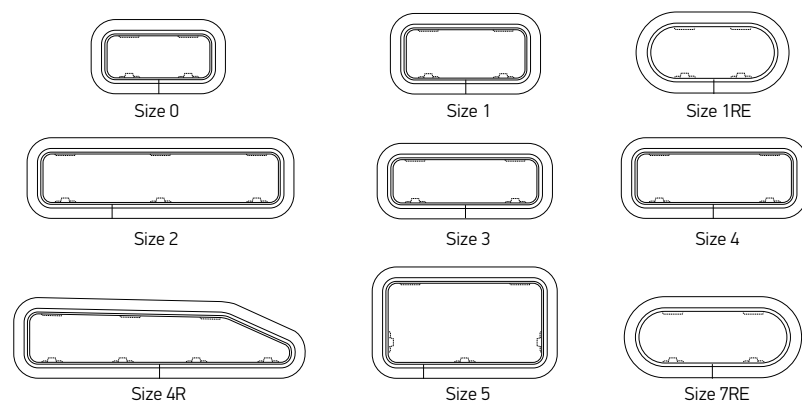

Standard Portlight Dimensions

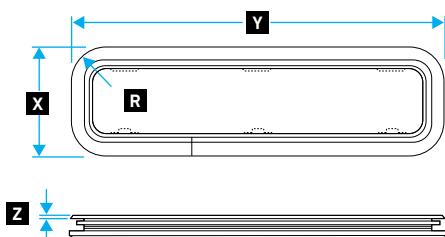

Standard Portlight Cut-out



PART NUMBER	SIZE	OVERALL DIMENSIONS								CUT-OUT DIMENSIONS						PORTLIGHT WEIGHT		ACRYLIC WINDOW THICKNESS	
		X LENGTH		Y WIDTH		Z HEIGHT		R RADII		X1 LENGTH		Y1 WIDTH		R1 RADII					
		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb	mm	in
393020200	0	176	6 ¹⁵ / ₁₆	323	12 ¹¹ / ₁₆	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	156	6 ¹ / ₈	303	11 ¹⁵ / ₁₆	52.0	2 ¹ / ₁₆	1.1	2.42	6	¹ / ₄
393120200	1	191	7 ¹ / ₂	367	14 ⁷ / ₁₆	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	171	6 ³ / ₄	347	13 ¹¹ / ₁₆	52.0	2 ¹ / ₁₆	1.3	2.86	6	¹ / ₄
393180200	1RE	191	7 ¹ / ₂	367	14 ⁷ / ₁₆	4	⁵ / ₃₂	95.5	3 ³ / ₄	171	6 ³ / ₄	347	13 ¹¹ / ₁₆	85.5	3 ³ / ₈	1.3	2.86	8	⁵ / ₁₆
393220200	2	176	6 ¹⁵ / ₁₆	425	16 ³ / ₄	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	156	6 ¹ / ₈	405	15 ⁵ / ₁₆	52.0	2 ¹ / ₁₆	1.4	3.08	8	⁵ / ₁₆
393320200	3	191	7 ¹ / ₂	449	17 ¹¹ / ₁₆	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	171	6 ³ / ₄	429	16 ⁷ / ₈	52.0	2 ¹ / ₁₆	1.7	3.74	10	³ / ₈
393420200	4	191	7 ¹ / ₂	646	25 ⁷ / ₁₆	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	171	6 ³ / ₄	626	24 ¹¹ / ₁₆	52.0	2 ¹ / ₁₆	2.4	5.28	8	⁵ / ₁₆
393440200	4R	195	7 ¹¹ / ₁₆	708	27 ⁷ / ₈	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	175	6 ⁷ / ₈	688	27 ¹ / ₁₆	52.0	2 ¹ / ₁₆	2.4	5.28	8	⁵ / ₁₆
393460200	4L	195	7 ¹¹ / ₁₆	708	27 ⁷ / ₈	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	175	6 ⁷ / ₈	688	27 ¹ / ₁₆	52.0	2 ¹ / ₁₆	2.4	5.28	8	⁵ / ₁₆
393520200	5	264	10 ³ / ₈	449	17 ¹¹ / ₁₆	4	⁵ / ₃₂	62.0	2 ⁷ / ₁₆	244	9 ⁵ / ₈	429	16 ⁷ / ₈	52.0	2 ¹ / ₁₆	2.3	5.15	10	³ / ₈
393780200	7RE	191	7 ¹ / ₂	425	16 ³ / ₄	4	⁵ / ₃₂	95.5	3 ³ / ₄	171	6 ³ / ₄	405	15 ¹⁵ / ₁₆	85.5	3 ³ / ₈	2.4	5.28	8	⁵ / ₁₆

Maximum hull thickness 34mm
Minimum hull thickness 7mm

All portlights are supplied with 12 off M5 x 25 screws for hull thickness 17-25mm
Portlights should be fitted to a flat surface +/- 1mm